



**US Army Corps  
of Engineers**  
Hydrologic Engineering Center

---

# **Corps Water Management System (CWMS)**

Technical Paper No. 158

June 2000

20010601 074

Papers in this series have resulted from technical activities of the Hydrologic Engineering Center. Versions of some of these have been published in technical journals or in conference proceedings. The purpose of this series is to make the information available for use in the Center's training program and for distribution within the Corps of Engineers

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

The contents of this report are not to be used for advertising, publication, or promotional purposes. Citation of trade names does not constitute an official endorsement or approval of the use of such commercial products.

# **Corps Water Management System (CWMS)**

## **Modernization Project Conceptual Overview**

**Arthur F. Pabst  
US Army, Corps of Engineers  
Hydrologic Engineering Center  
Davis, California**

Presented at  
Watershed Management & Operations Management 2000

June 20-24, 2000  
Colorado State University  
Fort Collins, Colorado

Available from:

Hydrologic Engineering Center  
609 Second Street  
Davis, Ca 95616

Via Internet at:

[www.hec.usace.army.mil](http://www.hec.usace.army.mil)

# Corps Water Management System (CWMS)

## Modernization Project Conceptual Overview

Arthur F. Pabst, Technical Project Manager,  
Hydrologic Engineering Center, Davis, California

### I - Background

As part of its Civil Works mission the US Army, Corps of Engineers designs, builds and operates a variety of water resource projects. Projects include, for example, multi-user storage reservoirs, navigation dams and locks, and levee systems with closure structures. Corps Emergency Operations often include re-enforcing or raising levees, sandbagging efforts, and evacuation during flooding. The Corps Water Management System (CWMS) is used to acquire real-time data on watershed conditions, develop forecasts of project inflows and uncontrolled flows below projects, determine project releases, and evaluate impacts. These tools provide

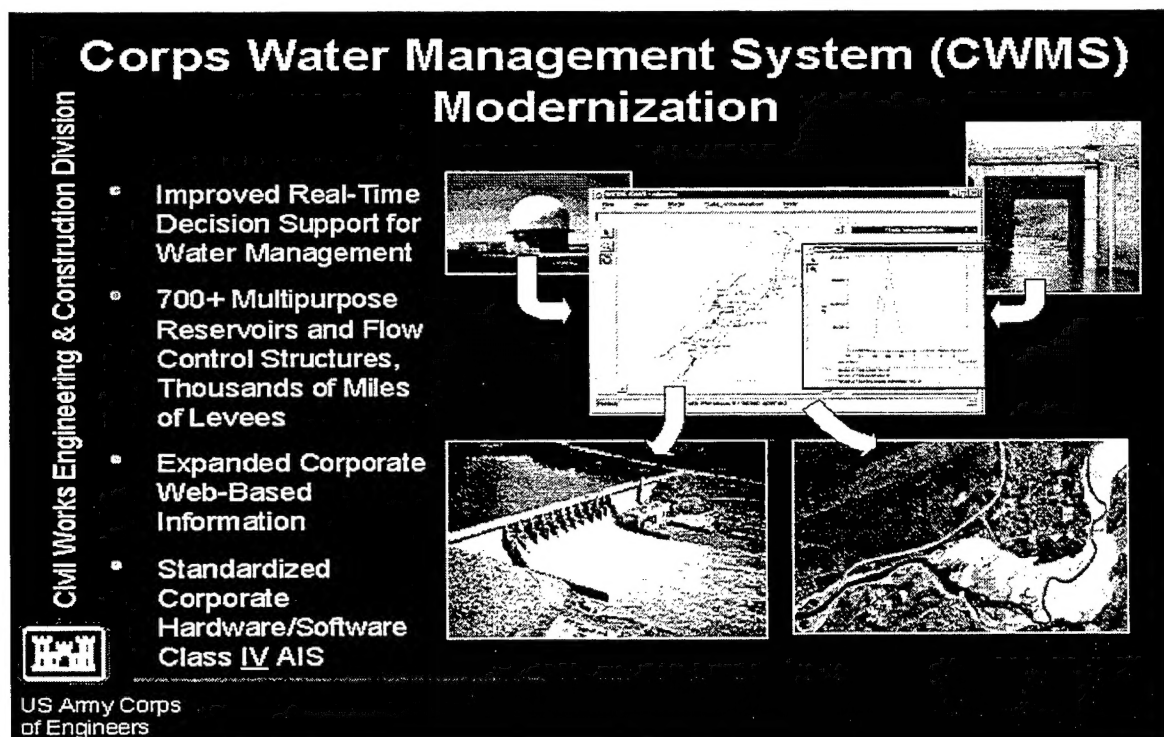


Figure 1 Corps Water Management System (CWMS) concepts.

critical information to Corps water managers to make informed engineering decisions under a variety of routine and emergency conditions. Corps water managers work in close coordination with other Federal (i.e., NWS, USBR, FEMA), state, and local water and emergency management, organizations to carry out their mission responsibilities.

The CWMS is currently undergoing a major modernization effort to incorporate state-of-the-art hydrologic modeling techniques, real-time data processing, decision support tools and network based information dissemination. An overall description of the modernization project is given. This includes a discussion of improved spatially distributed rainfall runoff modeling, reservoir operation modeling, steady and unsteady flow hydraulic routing, inundated area determination, and flow/stage impact analysis. Concepts of this modeling system are presented. Application of this new technology to a specific test area will be given in another paper.

## **II - Scope**

The CWMS encompasses steps in the water management process starting from the receipt of environmental and project data, through the modeling of system response and decision support analysis, ending with the dissemination of data and decision results. The incoming real time data include river stage, reservoir elevation, gage precipitation, WSR-88D spatial precipitation, quantitative precipitation forecasts (QPF) and other hydro-meteorological parameters. These data are used to derive the hydrologic response throughout a watershed area, including short-term future reservoir inflows and local uncontrolled downstream flows. The flows are then used by the reservoir operation model to provide proposed releases to meet reservoir and downstream operation goals. Then, based on the total expected flows in the river system, river profiles may be determined, inundated areas may be mapped, and flood impacts may be analyzed. The CWMS allows the water manager to evaluate any number of operation alternatives before coming to the final decision. For example, various alternative future precipitation amounts may be considered, hydrologic response may be altered, reservoir release rules may be investigated, bridge, levee or other river conditions may be evaluated. When an operation decision is made the results, along with supporting environmental data may be disseminated to others via web technology.

The system emphasizes visualization of information in time and space. The primary CWMS user interface is map based to provide clear spatial reference for watershed and modeling information. CorpsView, a Corps developed spatial visualization tool based on commercially available GIS software, provides a direct user interface to GIS products and associated spatial attribute information.

### III - Components

Figure 2 shows the major components of the CWMS (counter clockwise from upper left): Data Acquisition (DA), Data Base (DB), Modeling, Control and Visualization Interface (CAVI), Data Dissemination (DD). These components have been developed in a network client-server architecture, permitting each component of the system to be hosted on one or more different hardware platforms. The current server side equipment is Sun Solaris and the client side can be fielded on Windows NT or Sun Solaris. The major portion of the product is written in Java, with Fortran, and C++ used for certain of the model computations.


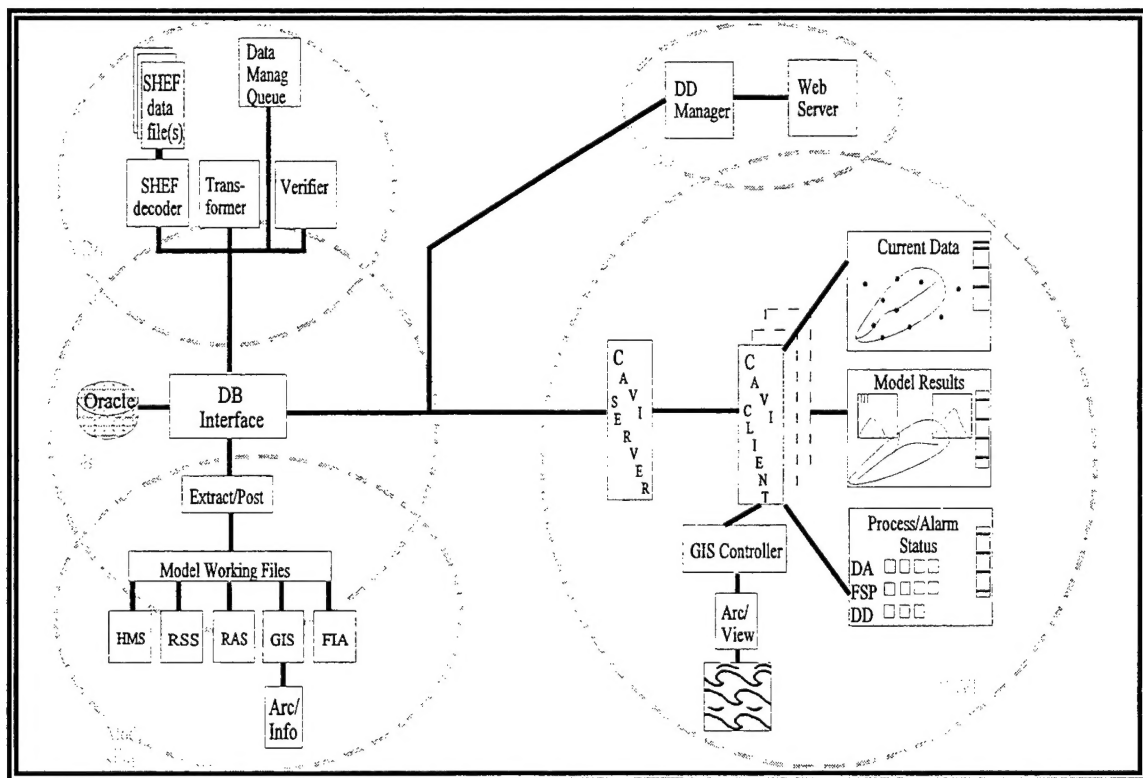


Figure 2 CWMS Components


**Data Acquisition** - The Data Acquisition(DA) component is responsible for ingesting data from any of the supported data sources. Currently, the primary data streams processed in the Corps are GOES Data Collection Platform (DCP) and National Weather Service SHEF. These and other formatted data may be processed as it is received via FTP or other file transfers, or via point-to-point network socket connections. Either type data is written directly to permanent storage and is then operated upon by the data acquisition software. Two levels of data screening may be performed. "On-the-fly" screening uses only simple magnitude and range checks. The second level of screening can perform tests that consider the rate of change of variables, comparison with neighboring stations, and other statistical tests. The DA component is also responsible for the derivation of secondary parameters. Typical derivations include: reservoir pool elevation to reservoir storage, river stage to flow, and accumulative precipitation to incremental precipitation. All data are stored in the data base during its processing by the DA components.

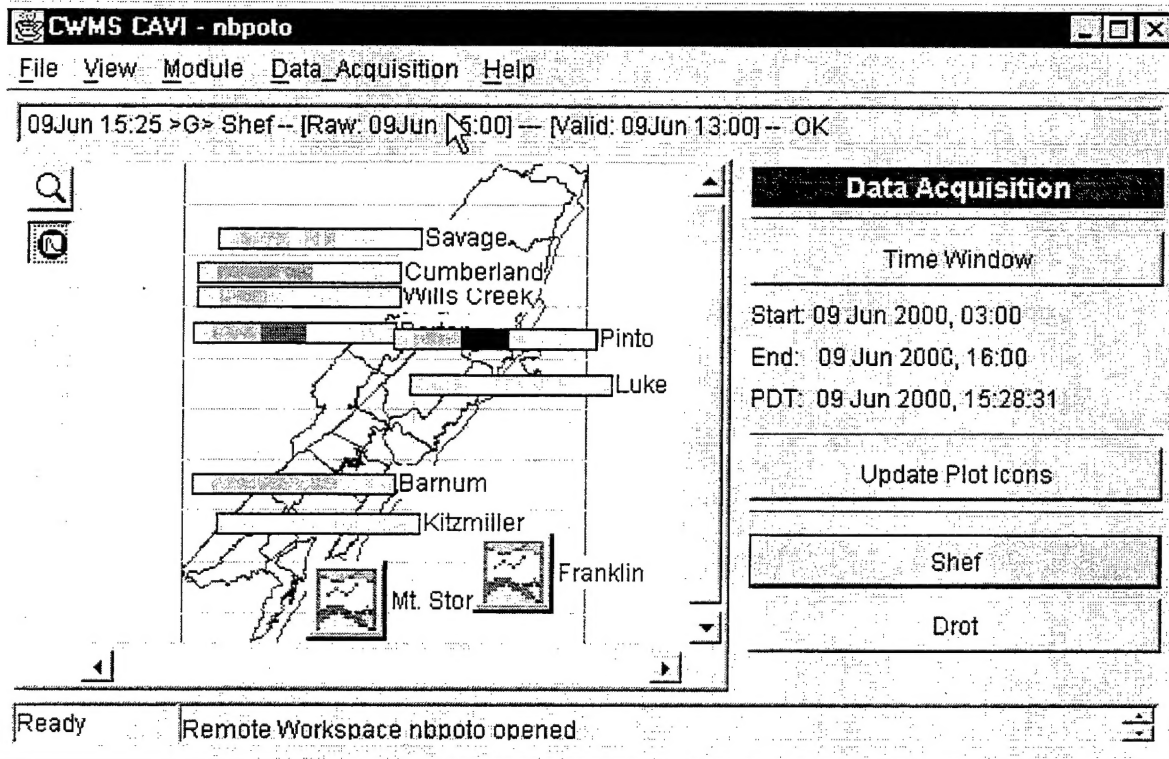

**Figure 3** Sample Data Acquisition Status Screen.

**Data Base** - The Data base (DB) component provides permanent data storage for the system. It is responsible for the management of all data received from the data streams and all data generated as derive and modeling operations are performed. All data written to or read from the data base are controlled by the Data Base Interface (DBI). The DBI provides a single image view of data that is used in the many components of CWMS. All data in the database are stored in Coordinated Universal Time (UTC) in System International (SI) units. Activities requesting data from the DBI receive the information in any units they desire. In all cases time remains in UTC and the application is responsible for displaying the time correctly in the users local time zone. The consistent use of UTC resolves issues where data crosses time zones and the problematic semiannual shifting between standard and daylight time.


Figure 4 shows thumbnail plots of river status for several locations.

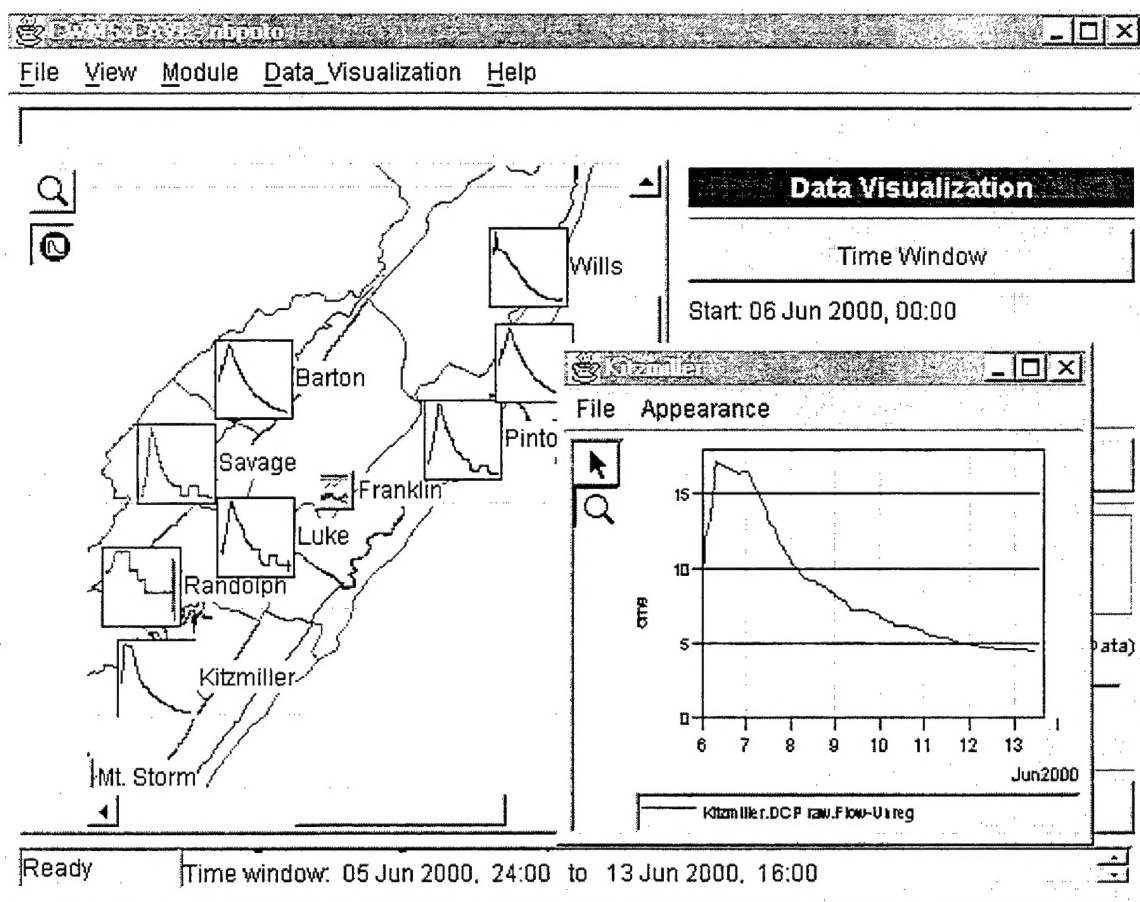

**Figure 4** Thumbnail plots of river stage data.




**Modeling** - The modeling component is responsible for the specification of model alternatives, the execution of model runs, and the display and interpretation of analysis results. The model suite includes precipitation input preparation, hydrologic response modeling, reservoir operation modeling, steady and unsteady flow river profile analysis, inundated area determination, and flood impact analysis. At a user specified forecast time, data pertinent to a watershed area is extracted from the data base and placed in a modeling sub-database. This sub-database is then the source and destination for all model runs and all the alternatives that are evaluated. At completion of the analysis the final operation alternative results are posted back to the master data base for dissemination. The sub-database, the related model parameters, and specific model output and log files can be saved to off-line storage to serve as a complete record of the analysis performed to support the decision process.

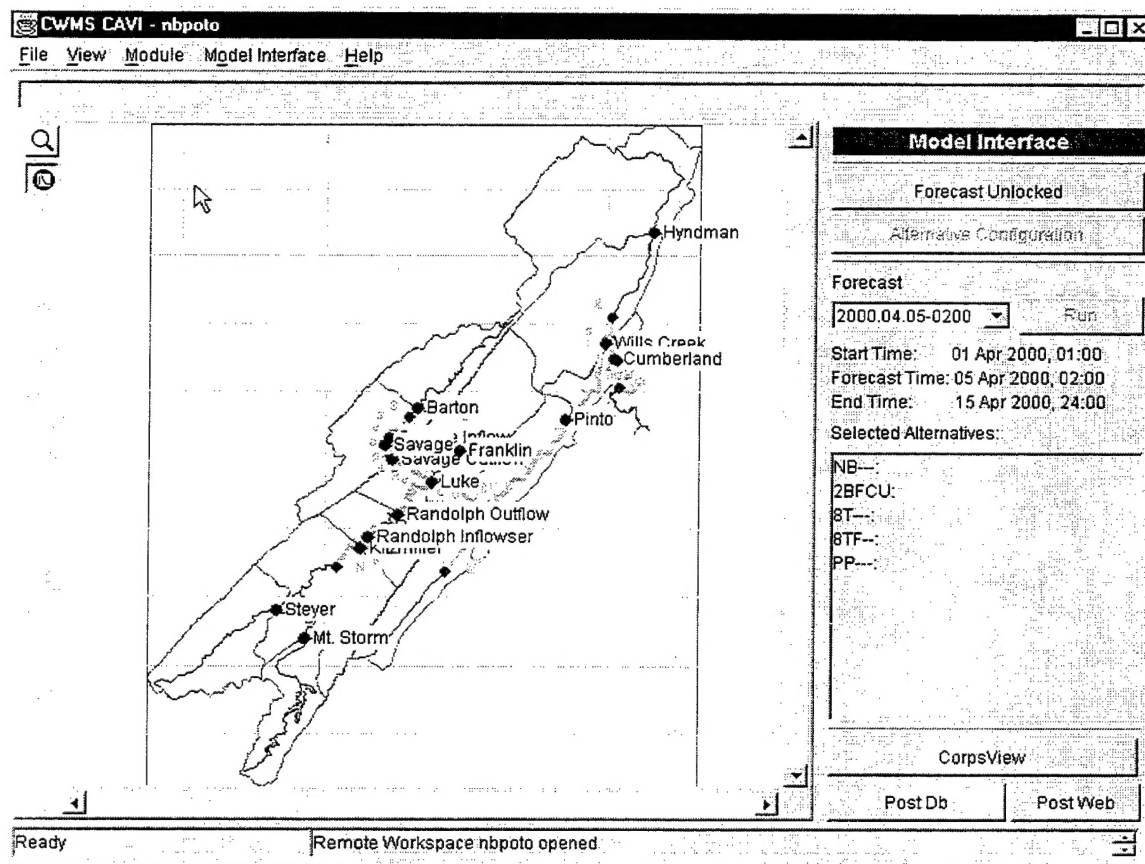


**Figure 5** CAVI - Model Interface Screen.

Hydrologic modeling - The hydrologic response of the watershed is modeled using spatially distributed precipitation. The HEC-HMS accepts gridded precipitation from both radar and point precipitation gage sources. Digital Elevation Model (DEM) data is used to develop model parameters. Runoff excess from each grid cell is determined and is routed using the Modified Clark procedure to provide runoff at the sub-basin outlet. Sub-basin hydrographs are then routed down through the channel network to develop flow into reservoirs, and local flow at downstream locations.

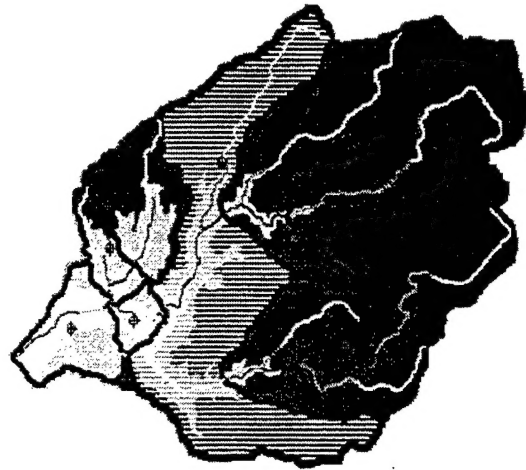


**Figure 6** Geo-Spatial defined basin characteristics

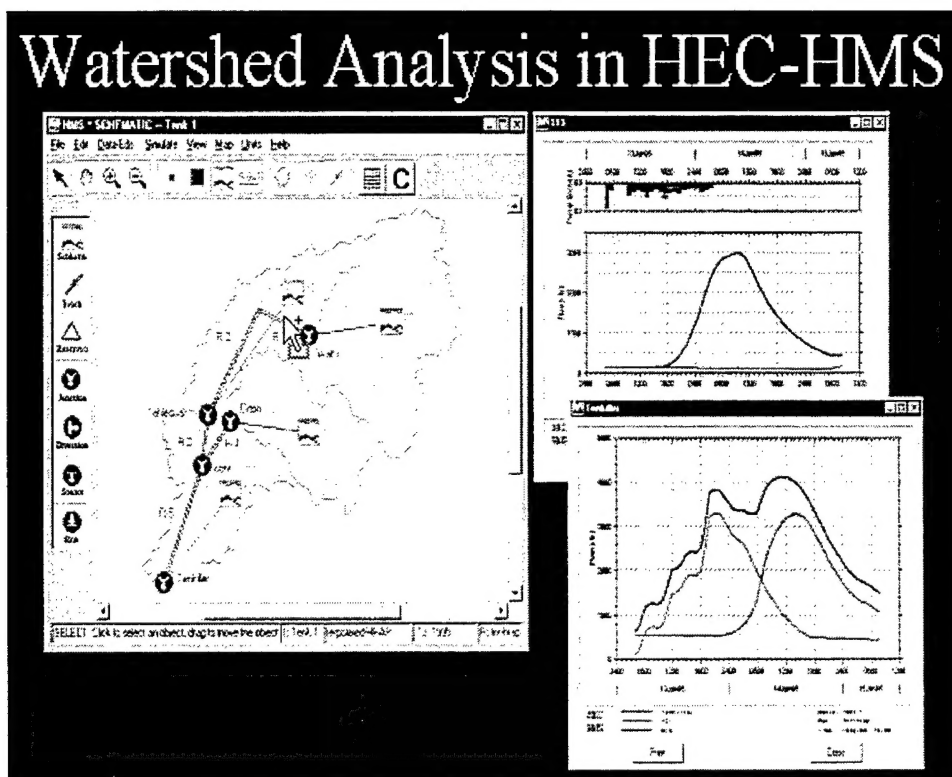


**Figure 7** HMS Model schematic and typical model results.

Reservoir modeling - The analysis of reservoir operations is performed using HEC-ResSim. This newly developed reservoir simulation program determines project releases based on a set of user supplied operation rules. This rule-based approach allows good flexibility in describing desired behavior for individual reservoirs operating for multiple local and downstream goals, as well as when reservoirs must operate as a system. The reservoir model uses inflows generated from the hydrologic model runs. Initial pool elevation, its corresponding reservoir storage and known project releases must be available to properly initialize the model. In cases where different rules lead to a conflict in determining releases, a rule priority is used to resolve the conflict. The determined releases are then combined with local uncontrolled flows from the hydrologic model to provide total flows throughout the watershed.

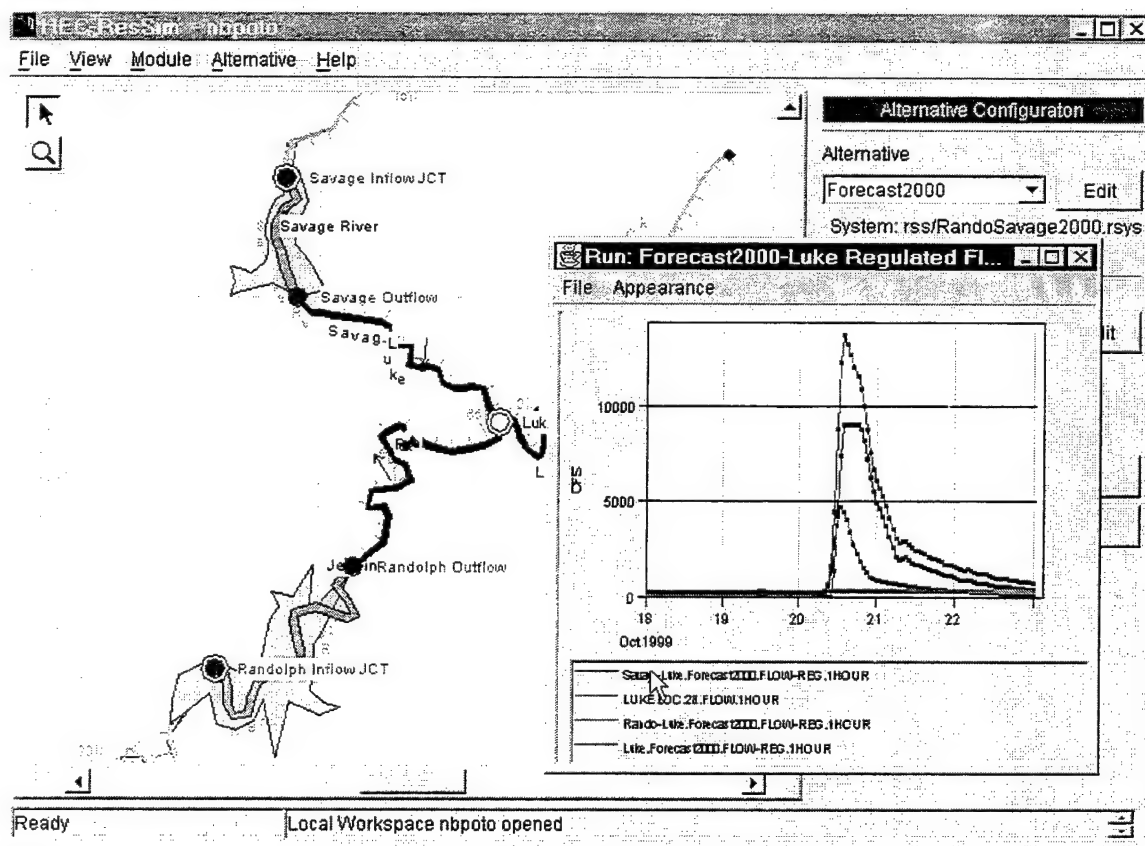


**Figure 8** Reservoir Simulation Model schematic and plot.

River Profile modeling - The total river flow for each of the alternatives is used to determine the water surface profiles above, through, and downstream of the reservoirs. The HEC-RAS model is capable of generating both steady and unsteady flow profiles. Each of these determinations is based on cross-section geometry. Geo-spatial tools may be used to assist in generating the necessary cross-sections from triangular irregular network (TIN) files. Because this operation can be performed with spatially registered cross-sections, the resulting water surface profiles can be used to map inundated areas.

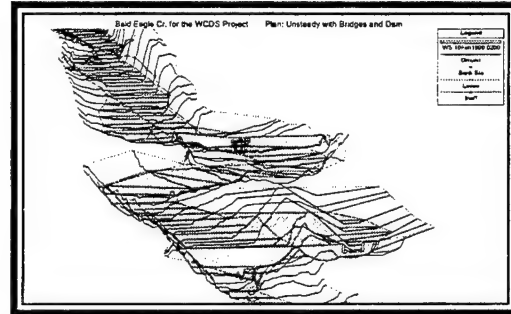

**Figure 9** Geo-Spatial Cross-Sections

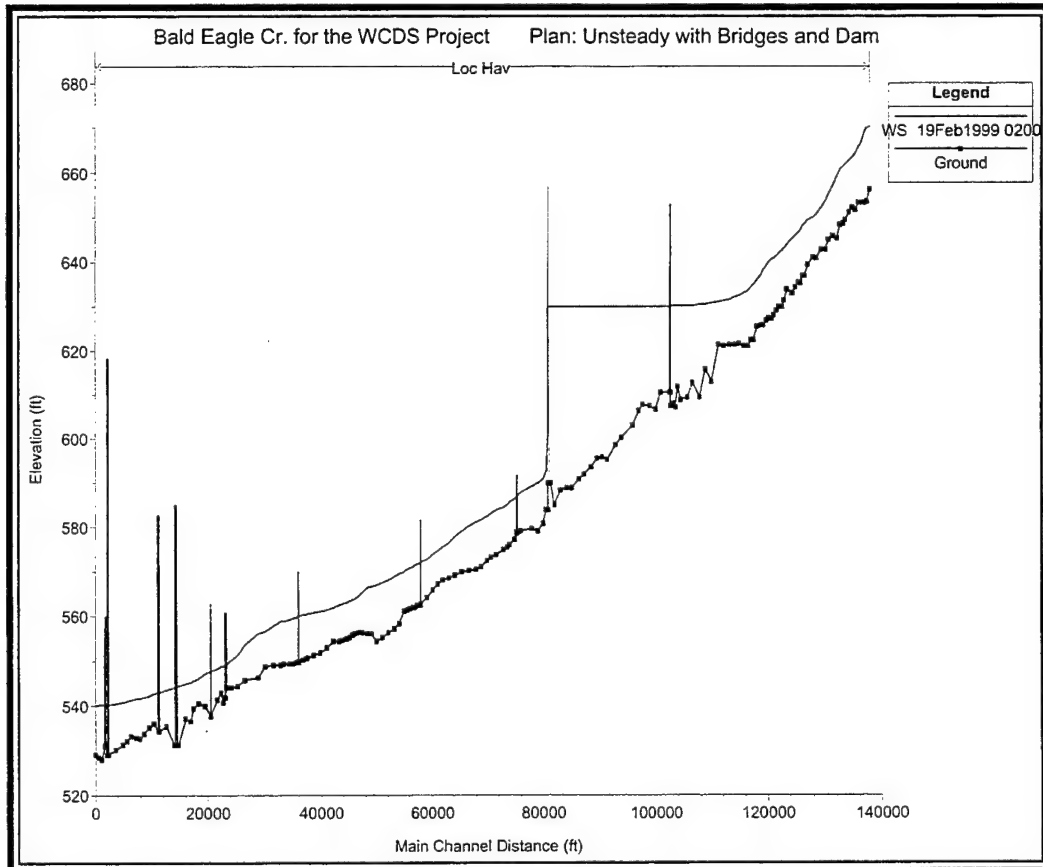


**Figure 10** River Profile

•



1

**Data Dissemination** - Internet Web and other automated technology are used to provide information from the CWMS to interested parties. Data received from the data acquisition components, derived data, and final project operation data are available for dissemination to other Corps offices, cooperating Federal, state and local agencies, and other public and private interests. A close working relationship exists between the Corps of Engineers and the National Weather Service (NWS). Information that the Corps of Engineers disseminates is solely associated with its mission to operate water projects, and to perform emergency flood fight activities. Public dissemination of flood alerts, flood warnings, and other weather information is the responsibility of the NWS.

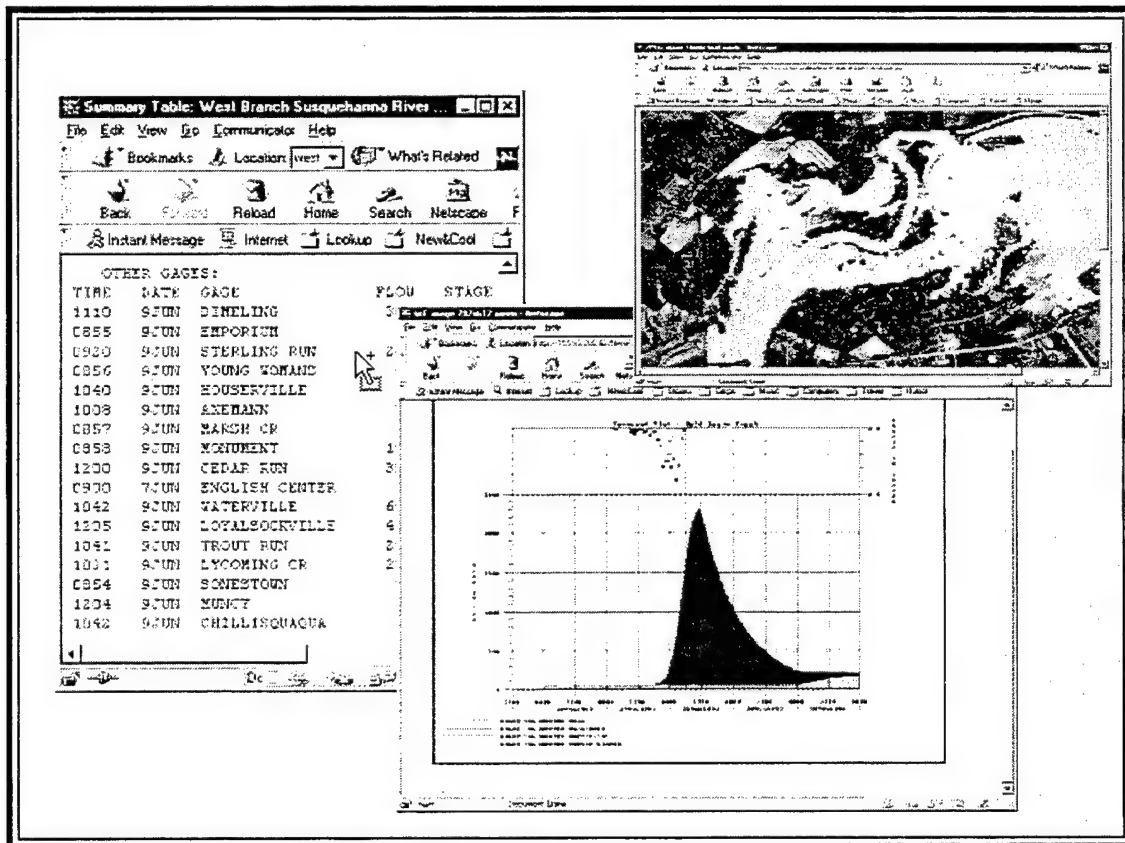

**Figure 12** Sample Dissemination Web Products.

## **IV - Summary**

The Corps of Engineers is modernizing the tools it uses in carrying out its water management mission. This includes decision support for reservoir project release determination, and emergency operation activities requiring hydrologic and hydraulic analysis. The modernized products utilize network based client-server architecture. One or more clients may be run from any location in a wide or local area network to access data and models. Any number of alternative scenarios may be evaluated including: various possible future precipitation inputs, reservoir operation alternatives, and river hydraulic or levee conditions. The capabilities described herein are part of the last stage of a three-stage development cycle. Four Corps field offices are being used to test and evaluate the modernized product at each stage in its development. The final product is scheduled for completion in the third quarter of 2001.

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.				
1. AGENCY USE ONLY (Leave blank)	2. REPORT DATE June 2000	3. REPORT TYPE AND DATES COVERED Technical Paper (TP)		
4. TITLE AND SUBTITLE Corps Water Management System (CWMS)		5. FUNDING NUMBERS		
6. AUTHOR(S) Arthur F. Pabst				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) US ARMY CORPS OF ENGINEERS HYDROLOGIC ENGINEERING CENTER (HEC) 609 Second Street Davis, CA 95616-4687		8. PERFORMING ORGANIZATION REPORT NUMBER TP-158		
9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES)		10. SPONSORING / MONITORING AGENCY REPORT NUMBER		
11. SUPPLEMENTARY NOTES				
12a. DISTRIBUTION / AVAILABILITY STATEMENT Unlimited. Approved for Public Release.		12b. DISTRIBUTION CODE		
13. ABSTRACT (Maximum 200 words) As part of its Civil works mission, the US Army Corps of Engineers designs, builds and operates a variety of water resources projects. Projects include, multi-use storage reservoirs, navigation dams and locks, and levee systems with closure structures. Corps Emergency Operations often include re-enforcing or raising levees, sandbagging efforts, and evacuation during flooding. The Corps Water Management System (CWMS) is used to acquire real-time data on watershed conditions, develop forecasts of project inflows and uncontrolled flows below projects, determine project releases, and evaluate impacts. These tools provide critical information to Corps water managers to make informed engineering decisions under a variety of routine and emergency conditions. An overall description of the modernization project is given, including a discussion of improved spatially distributed rainfall runoff modeling, reservoir operation modeling, steady an unsteady flow hydraulic routing, inundated area determination, and flow/stage impact analysis.				
14. SUBJECT TERMS Water Management, Hydrology, Data Acquisition, Reservoir Operations, Flow Forecasting, Flood Impacts, Flood inundation.			15. NUMBER OF PAGES 12	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT UNCLASSIFIED	18. SECURITY CLASSIFICATION OF THIS PAGE UNCLASSIFIED	19. SECURITY CLASSIFICATION OF ABSTRACT UNCLASSIFIED	20. LIMITATION OF ABSTRACT UNLIMITED	



## TECHNICAL PAPER SERIES

- |       |  |       |   |
|-------|--|-------|---|
| TP-1  | Use of Interrelated Records to Simulate Streamflow   | TP-38 | Water Quality Evaluation of Aquatic Systems   |
| TP-2  | Optimization Techniques for Hydrologic Engineering   | TP-39 | A Method for Analyzing Effects of Dam Failures in Design Studies  |
| TP-3  | Methods of Determination of Safe Yield and Compensation Water from Storage Reservoirs        | TP-40 | Storm Drainage and Urban Region Flood Control Planning  |
| TP-4  | Functional Evaluation of a Water Resources System  | TP-41 | HEC-5C, A Simulation Model for System Formulation and Evaluation  |
| TP-5  | Streamflow Synthesis for Ungaged Rivers  | TP-42 | Optimal Sizing of Urban Flood Control Systems   |
| TP-6  | Simulation of Daily Streamflow   | TP-43 | Hydrologic and Economic Simulation of Flood Control Aspects of Water Resources Systems                                    |
| TP-7  | Pilot Study for Storage Requirements for Low Flow Augmentation                               | TP-44 | Sizing Flood Control Reservoir Systems by Systems Analysis  |
| TP-8  | Worth of Streamflow Data for Project Design - A Pilot Study                                  | TP-45 | Techniques for Real-Time Operation of Flood Control Reservoirs in the Merrimack River Basin                               |
| TP-9  | Economic Evaluation of Reservoir System Accomplishments                                      | TP-46 | Spatial Data Analysis of Nonstructural Measures   |
| TP-10 | Hydrologic Simulation in Water-Yield Analysis  | TP-47 | Comprehensive Flood Plain Studies Using Spatial Data Management Techniques  |
| TP-11 | Survey of Programs for Water Surface Profiles  | TP-48 | Direct Runoff Hydrograph Parameters Versus Urbanization   |
| TP-12 | Hypothetical Flood Computation for a Stream System   | TP-49 | Experience of HEC in Disseminating Information on Hydrological Models   |
| TP-13 | Maximum Utilization of Scarce Data in Hydrologic Design                                      | TP-50 | Effects of Dam Removal: An Approach to Sedimentation  |
| TP-14 | Techniques for Evaluating Long-Term Reservoir Yields   | TP-51 | Design of Flood Control Improvements by Systems Analysis: A Case Study  |
| TP-15 | Hydrostatistics - Principles of Application  | TP-52 | Potential Use of Digital Computer Ground Water Models   |
| TP-16 | A Hydrologic Water Resource System Modeling Techniques                                       | TP-53 | Development of Generalized Free Surface Flow Models Using Finite Element Techniques                                       |
| TP-17 | Hydrologic Engineering Techniques for Regional Water Resources Planning                      | TP-54 | Adjustment of Peak Discharge Rates for Urbanization   |
| TP-18 | Estimating Monthly Streamflows Within a Region   | TP-55 | The Development and Servicing of Spatial Data Management Techniques in the Corps of Engineers                             |
| TP-19 | Suspended Sediment Discharge in Streams  | TP-56 | Experiences of the Hydrologic Engineering Center in Maintaining Widely Used Hydrologic and Water Resource Computer Models |
| TP-20 | Computer Determination of Flow Through Bridges   | TP-57 | Flood Damage Assessments Using Spatial Data Management Techniques   |
| TP-21 | An Approach to Reservoir Temperature Analysis  | TP-58 | A Model for Evaluating Runoff-Quality in Metropolitan Master Planning   |
| TP-22 | A Finite Difference Method for Analyzing Liquid Flow in Variably Saturated Porous Media      | TP-59 | Testing of Several Runoff Models on an Urban Watershed  |
| TP-23 | Uses of Simulation in River Basin Planning   | TP-60 | Operational Simulation of a Reservoir System with Pumped Storage  |
| TP-24 | Hydroelectric Power Analysis in Reservoir Systems  | TP-61 | Technical Factors in Small Hydropower Planning  |
| TP-25 | Status of Water Resource Systems Analysis  | TP-62 | Flood Hydrograph and Peak Flow Frequency Analysis   |
| TP-26 | System Relationships for Panama Canal Water Supply   | TP-63 | HEC Contribution to Reservoir System Operation  |
| TP-27 | System Analysis of the Panama Canal Water Supply   | TP-64 | Determining Peak-Discharge Frequencies in an Urbanizing Watershed: A Case Study   |
| TP-28 | Digital Simulation of an Existing Water Resources System                                     | TP-65 | Feasibility Analysis in Small Hydropower Planning   |
| TP-29 | Computer Applications in Continuing Education  | TP-66 | Reservoir Storage Determination by Computer Simulation of Flood Control and Conservation Systems                          |
| TP-30 | Drought Severity and Water Supply Dependability  | TP-67 | Hydrologic Land Use Classification Using LANDSAT  |
| TP-31 | Development of System Operation Rules for an Existing System by Simulation                   | TP-68 | Interactive Nonstructural Flood-Control Planning  |
| TP-32 | Alternative Approaches to Water Resource System Simulation                                   | TP-69 | Critical Water Surface by Minimum Specific Energy Using the Parabolic Method  |
| TP-33 | System Simulation for Integrated Use of Hydroelectric and Thermal Power Generation           | TP-70 | Corps of Engineers Experience with Automatic Calibration of a Precipitation-Runoff Model                                  |
| TP-34 | Optimizing Flood Control Allocation for a Multipurpose Reservoir                             | TP-71 | Determination of Land Use from Satellite Imagery for Input to Hydrologic Models   |
| TP-35 | Computer Models for Rainfall-Runoff and River Hydraulic Analysis                             | TP-72 | Application of the Finite Element Method to Vertically Stratified Hydrodynamic Flow and Water Quality                     |
| TP-36 | Evaluation of Drought Effects at Lake Atitlan  |       |   |
| TP-37 | Downstream Effects of the Levee Overtopping at Wilkes-Barre, PA, During Tropical Storm Agnes |       |   |

- TP-73 Flood Mitigation Planning Using HEC-SAM
- TP-74 Hydrographs by Single Linear Reservoir Model
- TP-75 HEC Activities in Reservoir Analysis
- TP-76 Institutional Support of Water Resource Models
- TP-77 Investigation of Soil Conservation Service Urban Hydrology Techniques
- TP-78 Potential for Increasing the Output of Existing Hydroelectric Plants
- TP-79 Potential Energy and Capacity Gains from Flood Control Storage Reallocation at Existing U. S. Hydropower Reservoirs
- TP-80 Use of Non-Sequential Techniques in the Analysis of Power Potential at Storage Projects
- TP-81 Data Management Systems for Water Resources Planning
- TP-82 The New HEC-1 Flood Hydrograph Package
- TP-83 River and Reservoir Systems Water Quality Modeling Capability
- TP-84 Generalized Real-Time Flood Control System Model
- TP-85 Operation Policy Analysis: Sam Rayburn Reservoir
- TP-86 Training the Practitioner: The Hydrologic Engineering Center Program
- TP-87 Documentation Needs for Water Resources Models
- TP-88 Reservoir System Regulation for Water Quality Control
- TP-89 A Software System to Aid in Making Real-Time Water Control Decisions
- TP-90 Calibration, Verification and Application of a Two-Dimensional Flow Model
- TP-91 HEC Software Development and Support
- TP-92 Hydrologic Engineering Center Planning Models
- TP-93 Flood Routing Through a Flat, Complex Flood Plain Using a One-Dimensional Unsteady Flow Computer Program
- TP-94 Dredged-Material Disposal Management Model
- TP-95 Infiltration and Soil Moisture Redistribution in HEC-1
- TP-96 The Hydrologic Engineering Center Experience in Nonstructural Planning
- TP-97 Prediction of the Effects of a Flood Control Project on a Meandering Stream
- TP-98 Evolution in Computer Programs Causes Evolution in Training Needs: The Hydrologic Engineering Center Experience
- TP-99 Reservoir System Analysis for Water Quality
- TP-100 Probable Maximum Flood Estimation - Eastern United States
- TP-101 Use of Computer Program HEC-5 for Water Supply Analysis
- TP-102 Role of Calibration in the Application of HEC-6
- TP-103 Engineering and Economic Considerations in Formulating
- TP-104 Modeling Water Resources Systems for Water Quality
- TP-105 Use of a Two-Dimensional Flow Model to Quantify Aquatic Habitat
- TP-106 Flood-Runoff Forecasting with HEC-1F
- TP-107 Dredged-Material Disposal System Capacity Expansion
- TP-108 Role of Small Computers in Two-Dimensional Flow Modeling
- TP-109 One-Dimensional Model For Mud Flows
- TP-110 Subdivision Froude Number
- TP-111 HEC-5Q: System Water Quality Modeling
- TP-112 New Developments in HEC Programs for Flood Control
- TP-113 Modeling and Managing Water Resource Systems for Water Quality
- TP-114 Accuracy of Computed Water Surface Profiles - Executive Summary
- TP-115 Application of Spatial-Data Management Techniques in Corps Planning
- TP-116 The HEC's Activities in Watershed Modeling
- TP-117 HEC-1 and HEC-2 Applications on the MicroComputer
- TP-118 Real-Time Snow Simulation Model for the Monongahela River Basin
- TP-119 Multi-Purpose, Multi-Reservoir Simulation on a PC
- TP-120 Technology Transfer of Corps' Hydrologic Models
- TP-121 Development, Calibration and Application of Runoff Forecasting Models for the Allegheny River Basin
- TP-122 The Estimation of Rainfall for Flood Forecasting Using Radar and Rain Gage Data
- TP-123 Developing and Managing a Comprehensive Reservoir Analysis Model
- TP-124 Review of the U.S. Army Corps of Engineering Involvement With Alluvial Fan Flooding Problems
- TP-125 An Integrated Software Package for Flood Damage Analysis
- TP-126 The Value and Depreciation of Existing Facilities: The Case of Reservoirs
- TP-127 Floodplain-Management Plan Enumeration
- TP-128 Two-Dimensional Floodplain Modeling
- TP-129 Status and New Capabilities of Computer Program HEC-6: "Scour and Deposition in Rivers and Reservoirs"
- TP-130 Estimating Sediment Delivery and Yield on Alluvial Fans
- TP-131 Hydrologic Aspects of Flood Warning - Preparedness Programs
- TP-132 Twenty-five Years of Developing, Distributing, and Supporting Hydrologic Engineering Computer Programs
- TP-133 Predicting Deposition Patterns in Small Basins
- TP-134 Annual Extreme Lake Elevations by Total Probability Theorem
- TP-135 A Muskingum-Cunge Channel Flow Routing Method for Drainage Networks
- TP-136 Prescriptive Reservoir System Analysis Model - Missouri River System Application
- TP-137 A Generalized Simulation Model for Reservoir System Analysis
- TP-138 The HEC NexGen Software Development Project
- TP-139 Issues for Applications Developers
- TP-140 HEC-2 Water Surface Profiles Program
- TP-141 HEC Models for Urban Hydrologic Analysis
- TP-142 Systems Analysis Applications at the Hydrologic Engineering Center
- TP-143 Runoff Prediction Uncertainty for Ungauged Agricultural Watersheds
- TP-144 Review of GIS Applications in Hydrologic Modeling

TP-145 Application of Rainfall-Runoff Simulation for  
Flood Forecasting  
TP-146 Application of the HEC Prescriptive Reservoir  
Model in the Columbia River System  
TP-147 HEC River Analysis System (HEC-RAS)  
TP-148 HEC-6: Reservoir Sediment Control  
Applications  
TP-149 The Hydrologic Modeling System (HEC-HMS):  
Design and Development Issues  
TP-150 The HEC Hydrologic Modeling System  
TP-151 Bridge Hydraulic Analysis with HEC-RAS  
TP-152 Use of Land Surface Erosion Techniques with  
Stream Channel Sediment Models  
TP-153 Risk-based Analysis for Corps Flood Project  
Studies - a Status Report  
TP-154 Modeling Water-Resource Systems for Water  
Quality Management  
TP-155 Runoff Simulation Using Radar Rainfall Data  
TP-156 Status of HEC Next Generation Software  
Development  
TP-157 Unsteady Flow Model for Forecasting Missouri  
and Mississippi Rivers  
TP-158 Corps Water Management System (CWSM)  
TP-159 Some History and Hydrology of the Panama  
Canal